

Rapid Station

Multi-Clean®
Your Guide To Clean



10 GPM Fill Rate

- Fills autoscrubbers and mop buckets 2-4 times faster than conventional dispensing equipment.
- Requires a 3/4" incoming water line to produce 10 gallons per minute.

Rapid Station Includes:

- Proportioning unit
- Instructions
- Watts vacuum breaker
- 10 ft. discharge hose
- Metering tips
- 8 ft. product supply hose
- Ceramic Weight
- Stainless steel check valve
- Bung adapter
- Mounting hardware




Rapid Station Products:

- Formula 305** - low foaming cleaner/degreaser
- Citrus Assault** - citrus-based cleaner/degreaser
- Century Maintenance** - neutral cleaner
- Blue Blazes** - synthetic detergent
- Formula 340** - heavy-duty degreaser
- Tough Green** - all-purpose cleaner



Rapid Station Drum Dispensing:

Assemble product supply hose as shown at left, insert appropriate tip and attach supply hose to product supply hose barb located on inductor. The Rapid Station dispenser fills auto scrubbers and other large reservoirs at 10 gallons per minute (37.8 liters per minute) 3 minutes for a 30 gallon tank. Unit includes a built in vacuum breaker, 10 feet of discharge hose, and metering tips to determine dilution ratio. Stainless steel cover and brass internal components offer durability.

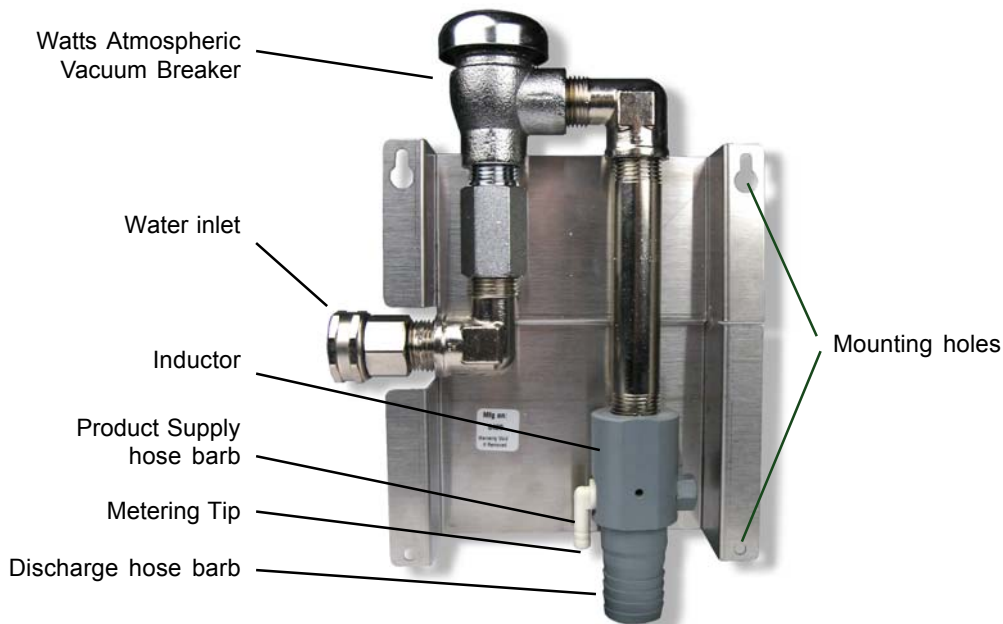

Operation:

1. Place product drum within 50 inches of Rapid Station.
2. Select proper dilution tip from the chart below.
3. Screw the dilution tip into the product supply hose barb.
4. Attach the product supply hose over the end of the product supply hose barb. Insert tubing with ceramic weight and check valve into drum through bung hole and secure.
5. Turn water source to ON.
6. Dispensing product:
 - a. Direct discharge hose into scrubber tank, extractor, etc.
 - b. Begin dispensing chemical by turning the ON/OFF valve lever all the way to ON.
 Note: Lever must be turned on all the way to dispense concentrates in correct proportions. Unit will draw chemical concentrate only when water in discharge hose backs up to inductor.
 - c. Turn ON/OFF valve lever to Off when tank is filled.

Installation:

REQUIREMENT: The incoming water supply must have a minimum 3/4" diameter line to produce 10 gallons per minute. The incoming water source must be a single source (cold water) line to prevent cross-connection control concerns. This unit is designed to be hard plumbed and is equipped with a 3/4 NPSF for ease of installation.

There are 4 mounting holes for installing this unit. Use enclosed hardware for mounting unit to wall. The installation location should be at least 12" above location of chemical concentrates used. Attach 1" diameter discharge hose to hose barb located on bottom of inductor and secure with hose clamp.

Recommended tips for use with Multi-Clean products

Product	Part No.	Heavy Cleaning Dilution	Tip Color	Normal Cleaning Dilution	Tip Color
Formula 305	910527	1:16	Blue	1:64	Pink
Formula 340	910467	1:32	Black	1:128	Yellow
Citrus Assault	910477	1:8	Orange	1:64	Pink
Blue Blazes	910497	1:32	Black	1:128	Yellow
Tough Green	903977	1:32	Gray	1:128	Purple
Century Maintenance	910577	1:32	Black	1:128	Yellow

WARNING & DISCLAIMER: Results may vary. Multi-Clean chemicals are to be used only by appropriately trained personnel. IMPROPER USE POSES RISK OF PHYSICAL INJURY OR PROPERTY DAMAGE. See appropriate Multi-Clean Method Bulletin for further warnings and information for your application. The suitability of and proper application of this product is the responsibility of the applicator. The manufacturer disclaims all warranties, express and implied, including any warranties of MERCHANTABILITY AND FITNESS OF PURPOSE. The manufacturer's liability is limited to replacement of or reimbursement for any product proved defective. No person has authority to waive these disclaimers or make any representations or warranties on behalf of the manufacturer, except in writing signed by the manufacturer.



600 Cardigan Road,
 Shoreview, MN 55126
 Phone 651-481-1900
 Fax 651-481-9987
 www.multi-clean.com