



Multi-Clean®
Your Guide to Clean

Energize Plus

High Gloss Spray Refinisher

- Spray & Burnish Restores Brilliant Gloss
- SoilShield repels soils for easier cleaning
- Use with High Speed, UHS and Low Speed Equipment



Energize Plus

High Gloss Spray Refinisher



Restores Gloss

Energize Plus is a ready-to-use spray buff/ burnish product that helps restore a beautiful wet-look gloss to floors. A unique blend of polymers, waxes, and solvents help enhance burnish response. Simply apply a light spray onto the floor and burnish immediately until dry.

SoilShield™ cleans up Competition


Dirt is the natural enemy of high gloss-high traffic floors causing discoloration and dingy appearance over time. SoilShield™ is exclusive technology that makes Energize Plus less compatible with dirt. SoilShield™ means floors clean-up better and look brighter for longer periods of time.

Designed for Speed

Energize Plus is designed for use in high or ultra high speed maintenance programs to improve appearance and enhance burnishing productivity. The product is particularly well suited for use with cord-electric burnishers. Also, Energize Plus may be used with low speed buffing equipment.

RTU Convenience

A single quart of Energize Plus will cover up to 25,000 sq. ft. Simply insert a sprayer into the bottle and you are ready to go. Spray a small amount onto the floor then burnish.

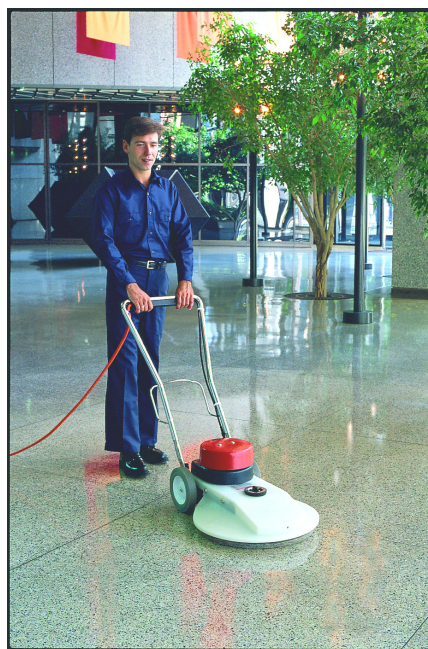

Energize Plus exceeds slip resistance when tested according to ASTM D-2047. (James Machine)



Learn More.....at www.multi-clean.com

*Training materials: Multi-Clean Method Bulletin 1415 provides detailed floor care procedures.

*Calculators: Easy online calculator provides estimates of product usage for a project.



WARNING & DISCLAIMER: Results may vary. Multi-Clean chemicals are to be used only by appropriately trained personnel. IMPROPER USE POSES RISK OF PHYSICAL INJURY OR PROPERTY DAMAGE. See appropriate Multi-Clean Method Bulletin for further warnings and information for your application. The suitability of and proper application of this product is the responsibility of the applier. The manufacturer disclaims all warranties, express and implied, including any warranties of MERCHANTABILITY AND FITNESS OF PURPOSE. The manufacturer's liability is limited to replacement of or reimbursement for any product proved defective. No person has authority to waive these disclaimers or make any representations or warranties on behalf of the manufacturer, except in writing signed by the manufacturer.

Properties	
Appearance	Milky white
% Active.....	5%
pH.....	9.0 - 9.3
Weight/Gallon	8.4 - 8.5
Slip Resistance.....	Exceeds 0.5 static coefficient of friction, James Machine
Color of Dry Film.....	Water clear
Application Temperature.....	50°F minimum
Storage Temperature	40°F minimum, 100°F maximum
Storage Stability	1 year under normal conditions
Freeze/Thaw Stability	Passes 3 cycles
VOC (minus water).....	0.8% (8g/L)

VOC compliance:

EPA, CA, IL, IN, MI, OH, OTC, UT, and Canadian regulations.

Packaging

12 quart case,
904028

07082021

Multi-Clean®

600 Cardigan Road
Shoreview, Minnesota
Phone 651-481-1900
Web www.multi-clean.com