




Multi-Clean®
Your Guide to Clean

Premier

*When You Don't
Intend to Buff!*



- Low Maintenance
- Maximum Scuff and Scratch Resistance
- Holds Shine the Longest of Any Finish
- No Need to Buff or Burnish

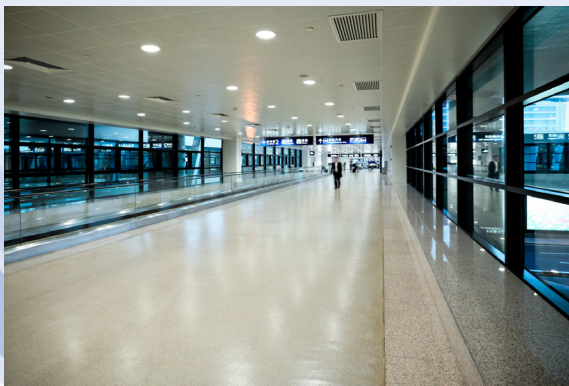

**The Hardest Finish Around
with BMR Technology**



Premier

High Traffic Floor Finish



Maximum Durability

PREMIER is based upon the most advanced thermoplastic polymer technology that combines gloss with wear properties that go beyond conventional finishes. PREMIER offers the highest durability in a floor finish with exceptional resistance to scuffing and black heel marking.

Brilliant Gloss

The brilliant, crystal clear gloss provided by PREMIER is enhanced with optical brighteners. The optical brighteners absorb non-visible light and re-emit it as visible light, enhancing the brilliance of the finish. Multiple coats of PREMIER can be applied quickly to achieve maximum gloss.

No Buffing Required

PREMIER is a low maintenance finish that is normally not high speed burnished. It is ideal for accounts that maintain floors with simple daily cleaning and periodic recoating. The durability of PREMIER allows the finish to retain gloss longer than other finishes with minimal maintenance. PREMIER can also be spray buffed with a low speed machine using BUFF-N-CLEAN.

The PREMIER Challenge

Compare the durable performance of PREMIER side by side with other finishes and you will see the difference:

- **Less scuffing/markings**
- **Holds shine longer**
- **Requires less recoating**
- **Looks brighter, longer**

The bottom line is floors look better and last longer between recoats and strip outs, saving you time and money.

Learn More.....at www.multi-clean.com

*Training materials: Multi-Clean Method Bulletin 1415 provides detailed floor care procedures.

*Calculators: Easy online calculator provides estimates of product usage for a project.



WARNING & DISCLAIMER: Results may vary. Multi-Clean chemicals are to be used only by appropriately trained personnel. IMPROPER USE POSES RISK OF PHYSICAL INJURY OR PROPERTY DAMAGE. See appropriate Multi-Clean Method Bulletin for further warnings and information for your application. The suitability of and proper application of this product is the responsibility of the applicator. The manufacturer disclaims all warranties, express and implied, including any warranties of MERCHANTABILITY AND FITNESS OF PURPOSE. The manufacturer's liability is limited to replacement of or reimbursement for any product proved defective. No person has authority to waive these disclaimers or make any representations or warranties on behalf of the manufacturer, except in writing signed by the manufacturer.

Multi-Clean®

600 Cardigan Road
Shoreview, Minnesota
Phone 651-481-1900
Web www.multi-clean.com



PREMIER exceeds slip resistance standards when tested according to ASTM D-2047 (James Machine).

Properties

| | |
|------------------------------|---|
| Appearance | Milky white liquid |
| Finish Type | Extended wear |
| Non-Volatile (solids)..... | 20.0 |
| pH..... | 8.5 - 9.0 |
| Weight/Gallon | 8.61 - 8.68 |
| Slip Resistance..... | Exceeds .5 static coefficient of friction |
| Coverage | 2000 - 3000 sq. ft./gal. |
| Soil Resistance..... | Excellent |
| Drying Time | 35 - 45 minutes |
| Color of Dry Film..... | Water clear |
| Application Temperature..... | 50°F (minimum) |
| Storage Temperature..... | 40°F minimum, 100°F maximum |
| Storage Stability | 1 year under normal conditions |
| Freeze-Thaw Stability..... | Passes three cycles |

VOC Compliant - VOC Free



Packaging

55 gallon drum, 904017
2 x 2.5 gallon case, 904015