
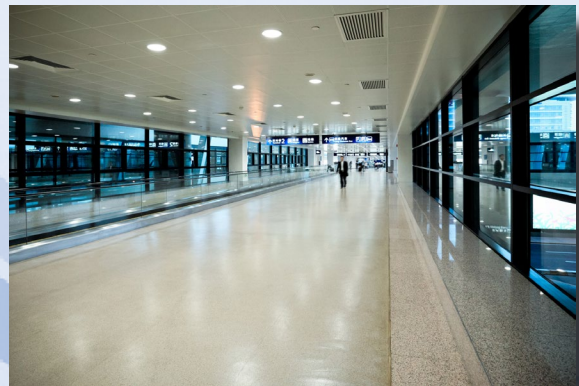


Multi-Clean®
Your Guide to Clean

Cohesion

Floor Coating

Self Polishing Finish

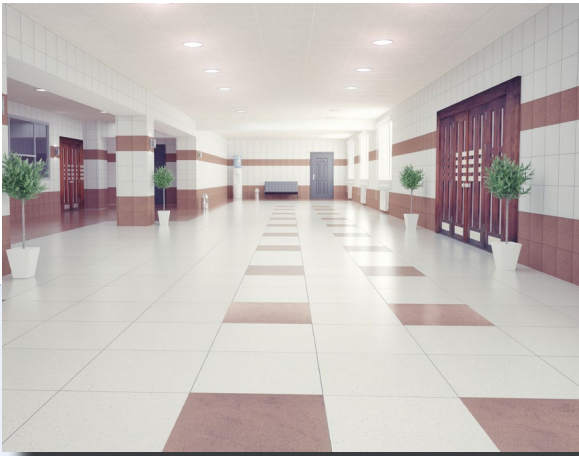

- High Shine - Low Maintenance
- Eliminates Stripping
- No Burnishing Required



Cohesion

FLOOR COATING

Self Polishing Finish



Cohesion Floor Coating is a new generation finish designed to reduce maintenance and eliminate the need to burnish. Cohesion Floor Coating is a self polishing finish when regularly cleaned with an automatic floor scrubber and Cohesion SBR using an appropriate Clean and Polish pad.

Regular cleaning using Multi-Clean's Cohesion SBR in an automatic scrubber equipped with a Clean and Polish pad is all that is needed to maintain a clean and glossy surface. Dust mopping regularly and ample walk off matting at entrances will keep the finish looking pristine.



Cohesion Floor Coating –

High Shine, Low Maintenance

- High Solids with great initial shine
- Less Scratching, scuffing and black marking
- No Burnishing or Stripping Required

Cohesion 8 SBR – Clean & Polish Maintainer

- Works with Clean & Polish pads to remove soil and build gloss
- Gloss slowly builds with each cleaning
- Save labor...No need to burnish

Cohesion 9 Intensity – Recoat Prep

- Works with surface prep pads** to remove multiple layers of old finish
- Intensive cleaning to remove deeply embedded dirt
- Leaves a clean prepared surface for recoating
- Save labor...No need to strip

Learn More.....at www.multi-clean.com

*Training materials: Multi-Clean Method Bulletin 1415 provides detailed floor care procedures.

*Calculators: Easy online calculator provides estimates of product usage for a project.



Packaging

Size	Part no.
55 gallon drum	904047
2 X 2.5 gallon case	904045

Learn More Online...

www.multi-clean.com



**No Burnishing or Stripping Required
if Maintained as Directed**

Properties

Appearance	Milky white liquid
Finish Type	Extended wear
Non-Volatile (solids).....	22 ± .5%
pH	8.0 - 9.0
Weight/Gallon	8.61 - 8.68
Slip Resistance.....	Exceeds .5 static coefficient
Coverage	2000 - 3000 sq. ft./gallon
Soil Resistance.....	Excellent
Drying Time	35 - 45 minutes
Color of Dry Film.....	Water clear
Application Temperature.....	50°F (minimum)
Storage Temperature.....	40°F minimum, 100°F maximum
Storage Stability	1 year under normal conditions
Freeze-Thaw Stability.....	Passes three cycles



All Multi-Clean products are proudly manufactured in the United States of America

Multi-Clean®
Your Guide to Clean

600 Cardigan Road
Shoreview Minnesota
Phone 651-481-1900
www.multi-clean.com

15092022